


Name Rule: e.g. ECS-40/12DC-A

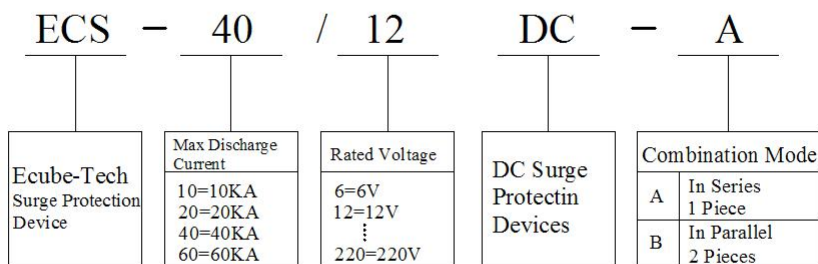

Electrical Specifications

Part No.	Nominal Discharge Current	Maximum Discharge Current	Operation Mode	Rated Voltage	Max Continuous Operating Voltage
	$I_{in}(8/20\mu s)$	$I_{max}(8/20\mu s)$	-	U_n	U_c
	(KA)	(KA)	-	(V)	(V)
ECS-10/DC Series	5	10	In Series/Paralleled	6,12,customized	7.5, 15, 30, 60, 135, 275....
ECS-20/DC Series	10	20	In Series/Paralleled	48,110,220V,customized	7.5, 15, 30, 60, 135, 275....
ECS-40/DC Series	20	40	In Paralleled	48,110,220V,customized	7.5, 15, 30, 60, 135, 275....
ECS-60/DC Series	30	60	In Paralleled	48,110,220V,customized	7.5, 15, 30, 60, 135, 275....

*Operating Temperature Range: -40℃~ + 85℃

*Relative Humidity: ≤95% (25℃)

*Housing Color: Grey white, Brown, Red (or customized)

CONTACT INFORMATION

Shanghai Ecube-Tech Electronics Technology Co., Ltd.

Email: Marketing@ecube-tech.com

Tel:+86 21 50723288

Fax:400 8892 163 Ext. 324988

Address: No.245, Jinan Road, Huangpu Area, Shanghai, 200021, China

Website: www.ecube-tech.com