



Structure(Unit:mm)

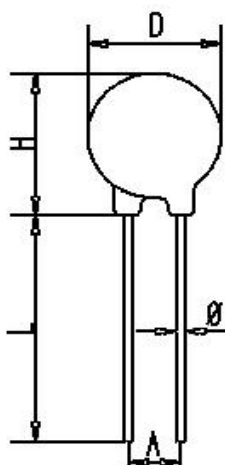

Item	Varistor Voltage	
	18-270V	300-1100V
Dmax	15.00	16.00
$\phi \pm 0.02$	0.78	0.78
Tmax	6.00	8.00
Hmax	18.00	19.00
Lmim	25.00	25.00
A ₊ 1.0	7.50	7.50

Electrical Specifications

Part No.	Varistor Voltage	Maximum Allowable Voltage		Maximum Clamping Voltage	Withstanding Surge Current		Energy	Rated Dissipation	Typical Capacitance (1kHz)
	V1mA	AC	DC	Vc	1times	2times	2ms		
	(V)	(V)	(V)	50A	(A)	(A)	(J)		
MYG14D180L	15.3-20.7	11	14	*38	1000	500	3.5	0.10	18000
MYG14D220L	18.7-25.3	14	18	*43	1000	500	4.0	0.10	15000
MYG14D270K	24-30	17	22	*53	1000	500	5.0	0.10	10000
MYG14D330K	30-36	20	26	*65	1000	500	6.0	0.10	8500
MYG14D390K	35-43	25	31	*77	1000	500	7.0	0.10	7500
MYG14D470K	42-52	30	38	*93	1000	500	8.5	0.10	6500
MYG14D560K	50-62	35	45	*110	1000	500	10.0	0.10	5600
MYG14D680K	61-75	40	56	*135	1000	500	12.0	0.10	4700
MYG14D820K	74-90	50	65	135	4500	2500	14.0	0.60	3900
MYG14D101K	90-110	60	85	165	4500	2500	18.0	0.60	3400
MYG14D121K	108-132	75	100	200	4500	2500	20.0	0.60	3100
MYG14D151K	135-165	95	125	250	4500	2500	25.0	0.60	3000
MYG14D181K	162-198	115	150	300	4500	2500	30.0	0.60	1030
MYG14D201K	185-225	130	170	340	4500	2500	35.0	0.60	970

MYG14D221K	198-242	140	180	360	4500	2500	40.0	0.60	840
MYG14D241K	216-264	150	200	395	4500	2500	40.0	0.60	710
MYG14D271K	243-297	175	225	455	4500	2500	50.0	0.60	650
MYG14D301K	270-330	195	250	505	4500	2500	52.5	0.60	600
MYG14D331K	297-363	210	275	550	4500	2500	64.0	0.60	550
MYG14D361K	324-396	230	300	595	4500	2500	65.0	0.60	500
MYG14D391K	351-429	250	320	650	4500	2500	70.0	0.60	480
MYG14D431K	387-473	275	350	710	4500	2500	75.0	0.60	440
MYG14D471K	423-517	300	385	775	4500	2500	80.0	0.60	420
MYG14D511K	459-561	320	418	842	4500	2500	85.0	0.60	390
MYG14D561K	504-616	350	460	920	4500	2500	85.0	0.60	360
MYG14D621K	558-682	385	505	1025	4500	2500	85.0	0.60	320
MYG14D681K	612-748	420	560	1120	4500	2500	90.0	0.60	290
MYG14D751K	675-825	460	615	1240	4500	2500	100.0	0.60	260
MYG14D781K	702-858	485	640	1290	4500	2500	105.0	0.60	230
MYG14D821K	738-902	510	670	1355	4500	2500	110.0	0.60	230
MYG14D911K	819-1001	550	745	1500	4500	2500	120.0	0.60	200
MYG14D102K	900-1100	625	825	1650	4500	2500	130.0	0.60	180
MYG14D112K	990-1210	680	895	1815	4500	2500	140.0	0.60	150
MYG14D182K	1620-1980	1000	1465	2970	4500	2500	240.0	0.60	120

*The clamping voltage from 180L to 680K is tested with current 10A.

CONTACT INFORMATION

Shanghai Ecube-Tech Electronics Technology Co., Ltd.

上海赫品电子科技有限公司

Email: Marketing@ecube-tech.com

Tel:+86 21 50723288

Fax:400 8892 163 Ext. 324988

Address: No.245, Jinan Road, Huangpu Area, Shanghai, 200021, China

Website: www.ecube-tech.com