



Structure(Unit:mm)

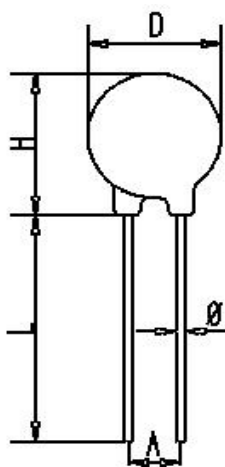

Item	Varistor Voltage	
	18-270V	300-820V
Dmax	11.00	12.00
$\phi \pm 0.02$	0.78	0.78
Tmax	6.00	8.00
Hmax	14.00	15.00
Lmim	25.00	25.00
A ₊ 1.0	7.50	7.50

Electrical Specifications

Part No.	Varistor Voltage	Maximum Allowable Voltage		Maximum Clamping Voltage	Withstanding Surge Current		Energy	Rated Dissipation	Typical Capacitance (1kHz)
	V1mA	AC	DC	Vc	1times	2times	2ms		
	(V)	(V)	(V)	25A	(A)	(A)	(J)		
MYG10D180L	15.3-20.7	11	14	*38	500	250	1.5	0.05	7500
MYG10D220L	18.7-25.3	14	18	*43	500	250	2.0	0.05	6000
MYG10D270K	24-30	17	22	*53	500	250	2.5	0.05	4800
MYG10D330K	30-36	20	26	*65	500	250	3.0	0.05	4200
MYG10D390K	35-43	25	31	*77	500	250	3.5	0.05	3700
MYG10D470K	42-52	30	38	*93	500	250	4.5	0.05	3300
MYG10D560K	50-62	35	45	*110	500	250	5.5	0.05	2900
MYG10D680K	61-75	40	56	*135	500	250	6.5	0.05	2500
MYG10D820K	74-90	50	65	135	2500	1250	8.0	0.40	2100
MYG10D101K	90-110	60	85	165	2500	1250	10.0	0.40	1700
MYG10D121K	108-132	75	100	200	2500	1250	12.0	0.40	1500
MYG10D151K	135-165	95	125	YG	2500	1250	16.0	0.40	1300
MYG10D181K	162-198	115	150	300	2500	1250	18.5	0.40	470
MYG10D201K	180-220	130	170	340	2500	1250	20.0	0.40	430

MYG10D221K	198-242	140	180	360	2500	1250	23.0	0.40	390
MYG10D241K	216-264	150	200	395	2500	1250	25.0	0.40	360
MYG10D271K	243-297	175	225	455	2500	1250	30.0	0.40	330
MYG10D301K	270-330	195	250	505	2500	1250	32.0	0.40	290
MYG10D331K	297-363	210	275	550	2500	1250	34.0	0.40	280
MYG10D361K	324-396	230	300	595	2500	1250	35.0	0.40	260
MYG10D391K	351-429	250	320	650	2500	1250	40.0	0.40	240
MYG10D431K	387-473	275	350	710	2500	1250	45.0	0.40	220
MYG10D471K	423-517	300	385	775	2500	1250	45.0	0.40	190
MYG10D511K	459-561	320	418	842	2500	1250	45.0	0.40	180
MYG10D561K	504-616	350	460	920	2500	1250	45.0	0.40	180
MYG10D621K	558-682	385	505	1025	2500	1250	45.0	0.40	160
MYG10D681K	612-748	420	560	1120	2500	1250	45.0	0.40	140
MYG10D751K	675-825	460	615	1240	2500	1250	50.0	0.40	130
MYG10D781K	702-858	485	640	1290	2500	1250	50.0	0.40	130
MYG10D821K	738-902	510	670	1355	2500	1250	55.0	0.40	130
MYG10D911K	819-1001	550	745	1500	2500	1250	60.0	0.40	120
MYG10D102K	900-1100	625	825	1650	2500	1250	65.0	0.40	100
MYG10D112K	990-1210	680	895	1815	2500	1250	90.0	0.40	90
MYG10D182K	1620-1980	1000	1465	2970	2500	1250	100.0	0.40	60

*The clamping voltage from 180L to 680K is tested with current 5A.

CONTACT INFORMATION

Shanghai Ecube-Tech Electronics Technology Co., Ltd.

上海赫品电子科技有限公司

Email: Marketing@ecube-tech.com

Tel:+86 21 50723288

Fax:400 8892 163 Ext. 324988

Address: No.245, Jinan Road, Huangpu Area, Shanghai, 200021, China

Website: www.ecube-tech.com