



Structure(Unit:mm)

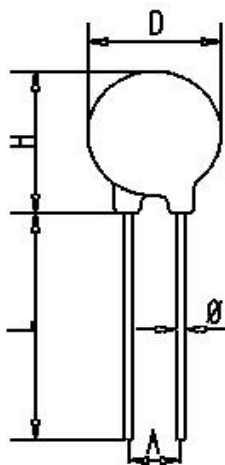

Item	Varistor Voltage	
	18-270V	300-1100V
Dmax	21.00	22.00
$\phi \pm 0.02$	1.00	1.00
Tmax	7.00	9.00
Hmax	24.00	25.00
Lmim	25.00	25.00
A ₊ 1.0	10.00	10.00

Electrical Specifications

Part No.	Varistor Voltage	Maximum Allowable Voltage		Maximum Clamping Voltage	Withstanding Surge Current		Energy	Rated Dissipation	Typical Capacitance (1kHz)
	V1mA	AC	DC	Vc	1times	2times	2ms		
	(V)	(V)	(V)	100A	(A)	(A)	(J)		
MYG20D180L	15.3-20.7	11	14	*38	2000	1000	10.0	0.20	39000
MYG20D220L	18.7-25.3	14	18	*43	2000	1000	13.0	0.20	32000
MYG20D270K	24-30	17	22	*53	2000	1000	15.0	0.20	22000
MYG20D330K	30-36	20	26	*65	2000	1000	20.0	0.20	18000
MYG20D390K	35-43	25	31	*77	2000	1000	24.0	0.20	16000
MYG20D470K	42-52	30	38	*93	2000	1000	30.0	0.20	14000
MYG20D560K	50-62	35	45	*110	2000	1000	35.0	0.20	12000
MYG20D680K	61-75	40	56	*135	2000	1000	40.0	0.20	10000
MYG20D820K	74-90	50	65	135	6500	4000	43.0	1.00	5800
MYG20D101K	90-110	60	85	165	6500	4000	45.0	1.00	4800
MYG20D121K	108-132	75	100	200	6500	4000	50.0	1.00	3800
MYG20D151K	135-165	95	125	250	6500	4000	55.0	1.00	3200
MYG20D181K	162-198	115	150	300	6500	4000	60.0	1.00	2600
MYG20D201K	185-225	130	170	340	6500	4000	70.0	1.00	2400

MYG20D221K	198-242	140	180	360	6500	4000	75.0	1.00	1800
MYG20D241K	216-264	150	200	395	6500	4000	80.0	1.00	1500
MYG20D271K	243-297	175	225	455	6500	4000	90.0	1.00	1400
MYG20D301K	270-330	195	250	505	6500	4000	100.0	1.00	1350
MYG20D331K	297-363	210	275	550	6500	4000	110.0	1.00	1300
MYG20D361K	324-396	230	300	595	6500	4000	120.0	1.00	1250
MYG20D391K	351-429	250	320	650	6500	4000	130.0	1.00	1180
MYG20D431K	387-473	275	350	710	6500	4000	140.0	1.00	1100
MYG20D471K	423-517	300	385	775	6500	4000	150.0	1.00	1050
MYG20D511K	459-561	320	418	842	6500	4000	150.0	1.00	1000
MYG20D561K	504-616	350	460	920	6500	4000	150.0	1.00	970
MYG20D621K	558-682	385	505	1025	6500	4000	160.0	1.00	950
MYG20D681K	612-748	420	560	1120	6500	4000	160.0	1.00	900
MYG20D751K	675-825	460	615	1240	6500	4000	175.0	1.00	850
MYG20D781K	702-858	485	640	1290	6500	4000	180.0	1.00	750
MYG20D821K	738-902	510	670	1355	6500	4000	190.0	1.00	700
MYG20D911K	819-1001	550	745	1500	6500	4000	215.0	1.00	600
MYG20D102K	900-1100	625	825	1650	6500	4000	230.0	1.00	500
MYG20D112K	990-1210	680	895	1815	6500	4000	250.0	1.00	450
MYG20D182K	1620-1980	1000	1465	2970	6500	4000	400.0	1.00	220

*The clamping voltage from 180L to 680K is tested with current 25A.

CONTACT INFORMATION

Shanghai Ecube-Tech Electronics Technology Co., Ltd.

上海赫品电子科技有限公司

Email: Marketing@ecube-tech.com

Tel:+86 21 50723288

Fax:400 8892 163 Ext. 324988

Address: No.245, Jinan Road, Huangpu Area, Shanghai, 200021, China

Website: www.ecube-tech.com